


PART NO. 119-XXXX-XX

119-XXXX-XX

OUTPUT FOR INSTRUMENT GAGE: 0 = 240/33 OHMS (USA STANDARD), 1 = 10/180 OHMS, 2 = 0-5V, 3 = 0-4V.
 LOW ALARM SET POINT: 0 = NO ALARM OR 1 = LOW ALARM.
 FITTING: 0 = 5 HOLE SAE BOLT PATTERN, 1 = 1/2" NPT FLATTED, 2 = 1-1/2" NPT FLATTED, 3 = 1/2" NPT HEX, 4 = SIDE WIRING
 TYPE OF LIQUID: D = DIESEL, G = GASOLINE, W = WATER, H = HYDRAULIC FLUID.
 LENGTH IN INCHES OF ALUMINUM TUBING: "L" DIMENSION (LENGTH FROM TOP TO BASE).

EXAMPLE: P/N 119-214D-10.5 = 0 TO 5 VOLT OUTPUT FOR GAUGE, LOW ALARM, SIDE WIRING, DIESEL LIQUID, 10.5" SENDER LENGTH ("L" DIMENSION).

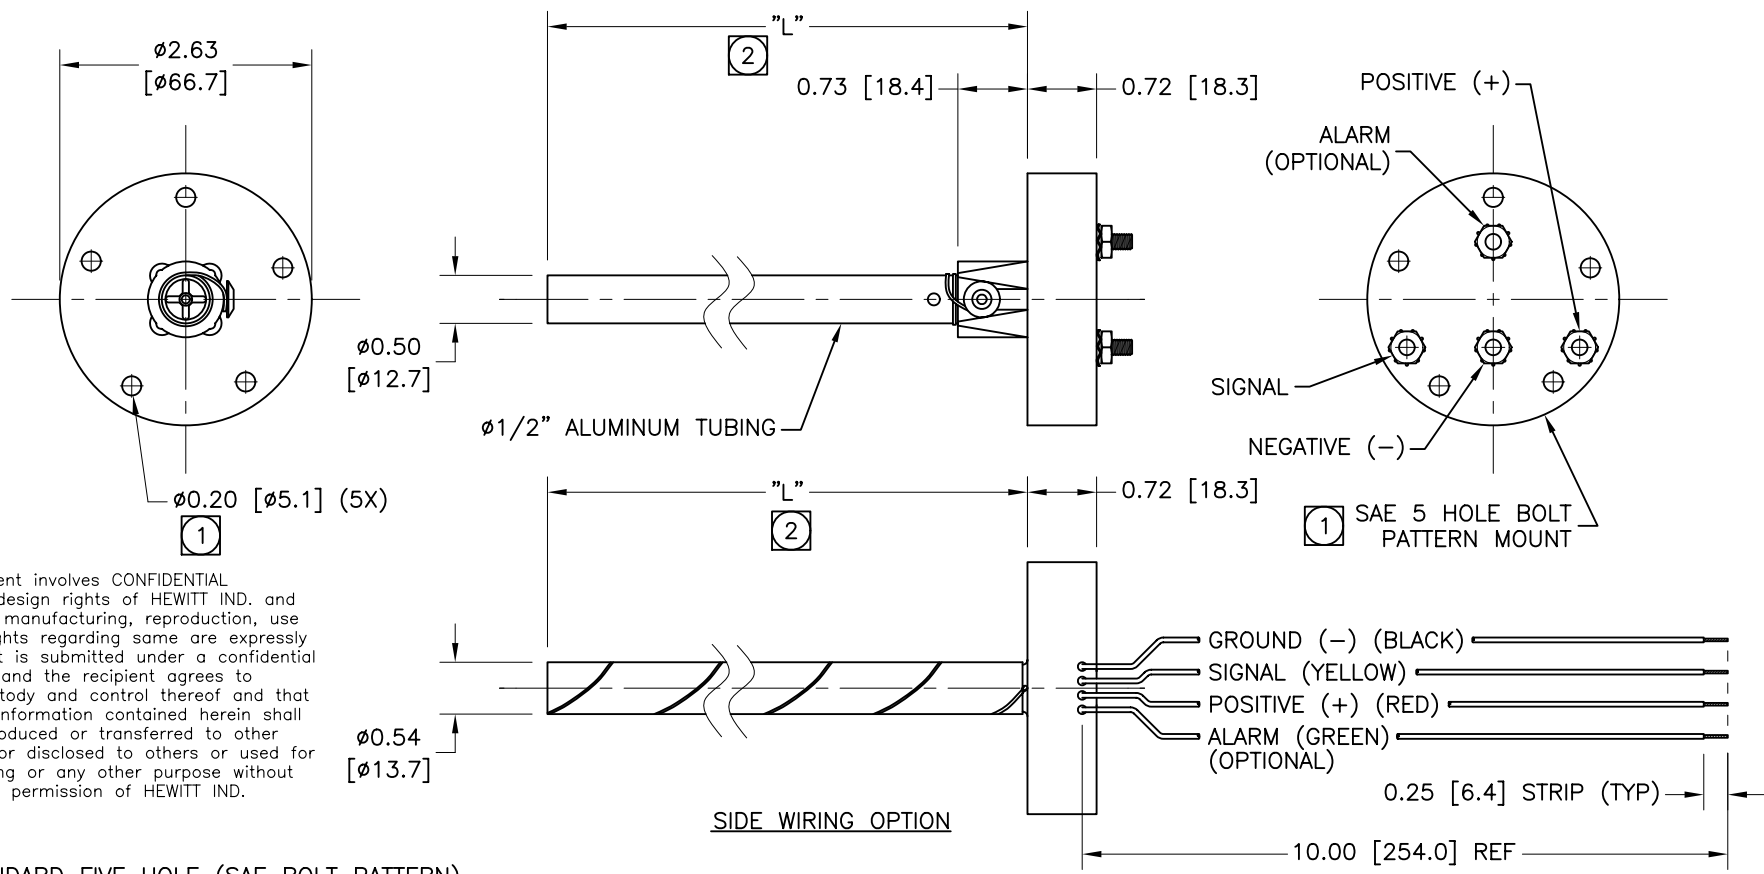

This document involves CONFIDENTIAL proprietary design rights of HEWITT IND. and all designs, manufacturing, reproduction, use and sale rights regarding same are expressly reserved. It is submitted under a confidential relationship and the recipient agrees to assume custody and control thereof and that proprietary information contained herein shall not be reproduced or transferred to other documents or disclosed to others or used for manufacturing or any other purpose without prior written permission of HEWITT IND.

NOTES:

1. STANDARD FIVE HOLE (SAE BOLT PATTERN) HOLDER SENDER MOUNT.
2. "L" DIMENSION FROM 3 INCHES [76.2mm] TO 144 INCHES [365.8cm].
3. DIMENSIONS ARE FOR REFERENCE ONLY.
4. THE "ALARM" SIGNAL IS OPTIONAL ON BOTH VERSIONS OF ELECTRIC SENDERS.
5. ELECTRIC LIQUID LEVEL SENDER WILL FUNCTION WITH BOTH 12 VOLT AND 24 VOLT SYSTEMS.

D

REVISIONS					TOLERANCES		HEWITT INDUSTRIES OF LOS ANGELES	
REV.	DESCRIPTION	EO#	DATE	BY	UNLESS OTHERWISE SPECIFIED:		TITLE: ELECTRIC LIQUID LEVEL SENDER	
					DIMENSIONS ARE IN INCHES, METRIC EQUIVALENTS ARE IN [BRACKETS]:		DRAWN BY: JAG	
					.X = .050 [1.27]		PART NO. 119-XXXX-XX	
					.XX = .030 [0.76]		APPR. BY: LM	
					.XXX = .010 [0.25]		DATE: 03/15/10	
					FRACTIONS = 1/32		SHEET 1 OF 1	
					ANGLES = ±1°			
					SCALE: 1/2			