

READ FIRST—IMPORTANT!

Shipboard Cable/Cord Installation

Recommended Connectors: Appleton CG-1850 or CG-2550 Cord Grip Connectors


1. Install the cord grip connector into the EVS case using 2 wraps (minimum)/3 wraps (maximum) of Teflon tape covering the entire thread of the ½ inch NPT end and tighten the cord grip housing into place.
2. Push the cord grip nut then the washer over the end of the outer braid on the shipboard cable.
3. Strip the outer sheath and braid of the shipboard cable **and** allow the desired length of insulated wire to be exposed.
4. Push the braid back from the end of the cable's insulating sheath approximately 1 - 2 inches and allow it to flair out.
5. Pull the washer up to the braid, **push it into the flared braid to seat the braid firmly against the washer**, and trim the braid to the diameter of the washer.
6. Push the cord grip grommet over the cable sheath up to the braid flair and sandwich the flair between the washer and the grommet.
7. Insert the stripped cable and grommet into the cord grip housing and push it in until the grommet is firmly in place.
8. When installing the shipboard cable into the cord grip connector, it is important to align the shipboard cable and grommet with the axis of the connector housing and keep it as straight as possible.
9. Pull the nut over the washer and braid, thread the nut onto the cord grip housing and hand tighten the nut as tight as it will go by hand. Do **NOT** use pliers or wrench as it will over tighten and damage the seal.
10. The grommet must remain seated squarely in the housing as the nut and washer is tightened onto the housing. This will help to prevent water from getting through.
11. When completed the cable should be tight in the rubber seal and should not slip in or out of the connector. A long slow bend can be applied to fit the installation.

12. Use a 90 degree cord grip connector where tight bends are desired and orient the opening at the lowest point (bottom).

13. This process should be followed for straight or 90 degree cord grip connectors.



DON'T DO THIS!

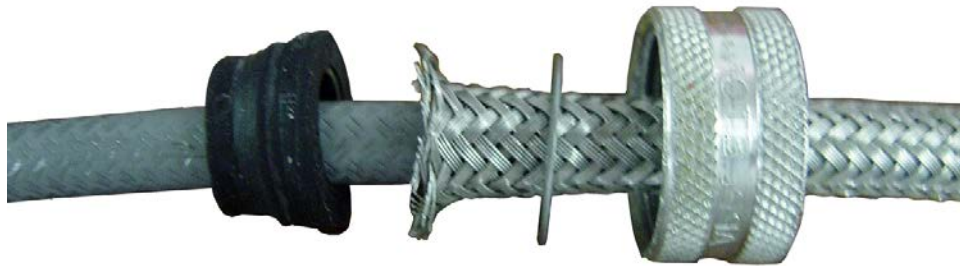

DO THIS!

ENOVATION CONTROLS CORPORATE HEADQUARTERS
5311 S 122ND EAST AVENUE
TULSA, OK 74146

ENOVATION CONTROLS – SAN ANTONIO OFFICE
5757 FARINON DRIVE
SAN ANTONIO, TX 78249

ENOVATION CONTROLS – HOUSTON OFFICE
105 RANDON DYER RD
ROSENBERG, TX 77471

FW MURPHY, LTD. – UNITED KINGDOM
CHURCH ROAD LAVERSTOCK
SALISBURY SP1 1QZ UK

MURPHY ECONTROLS TECHNOLOGIES (HANGZHOU) CO, LTD.
77 23RD STREET
HANGZHOU ECONOMIC & TECHNOLOGICAL DEVELOPMENT AREA
HANGZHOU, ZHEJIANG 310018 CHINA

DOMESTIC SALES & SUPPORT

ECONTROLS PRODUCTS
PHONE: 210 495 9772
FAX: 210 495 9791
EMAIL: INFO@ECONTROLS.COM
WWW.ECONTROLS.COM

MURPHY PRODUCTS
PHONE: 918 317 4100
FAX: 918 317 4266
EMAIL: SALES@FWMURPHY.COM
WWW.FWMURPHY.COM

MURPHY CONTROL SYSTEMS & SERVICES
PHONE: 281 633 4500
FAX: 281 633 4588
EMAIL: CSS-SOLUTIONS@FWMURPHY.COM

MURPHY INDUSTRIAL PANEL DIVISION
PHONE: 918 317 4100
FAX: 918 317 4124
EMAIL: IPDSALES@FWMURPHY.COM

INTERNATIONAL SALES & SUPPORT

UNITED KINGDOM
PHONE: +44 1722 410055
FAX: +44 1722 410088
EMAIL: SALES@FWMURPHY.CO.UK
WWW.FWMURPHY.CO.UK

CHINA
PHONE: +86 571 8788 6060
FAX: +86 571 8684 8878
EMAIL: APSALES@FWMURPHY.COM

LATIN AMERICA & CARIBBEAN
PHONE: 918 317 2500
EMAIL: LASALES@FWMURPHY.COM

SOUTH KOREA
PHONE: +82 70 7951 4100
EMAIL: SKOREASALES@FWMURPHY.COM

INDIA
PHONE: +91 91581 37633
EMAIL: INDIAALES@FWMURPHY.COM

**ISO 9001
REGISTERED**



USA (TULSA) - ISO 9001:2008 FM 28221
USA (ROSCENERS) - ISO 9001:2008 FM 28621
UK - ISO 9001:2008 FM 29422
CHINA - ISO 9001:2008 FM 52385
Registered Facilities

Printed in the USA